

16' | 24' SSB ANTENNAS



SINGLE SIDE BAND ANTENNAS

YACHTS | BOATS | COMMERCIAL VESSELS

When the range of a VHF radio just won't do, offshore vessel operators choose Digital Antenna's high performance Single Side Band antennas for exceptional communication over the entire HF frequency range. Heavy duty construction for use in the roughest seas, Digital Antenna SSB antennas are a popular choice for boaters when durability, performance and great looks are prerequisites. Available in 16' or 24' lengths to accommodate even the most pristine of motor yachts.

All SSB Antennas Feature:

- Powerful brass radiators.
- Soldered connections.
- Centering foam insulator.
- High gloss urethane finish.

Hand-assembled 16' and 24' SSB Antennas are UPS shippable.

500 Series: 16' – 544-SSW | 544-SSB
24' – 534-SSW | 534-SSB

Mount: Standard 1"-14 threaded base.



RF Termination: 1/4"-20 stainless steel stud.

Cable: Not included.

Replacement SSB top:

8' – 546-SSW | 546-SSB

A simple solution to replacing the top section to Digital Antenna's 16 or 24 foot SSB antennas. This 8' SSB top section is available by itself but must be used with either the 16 or 24 foot SSB bottom sections.

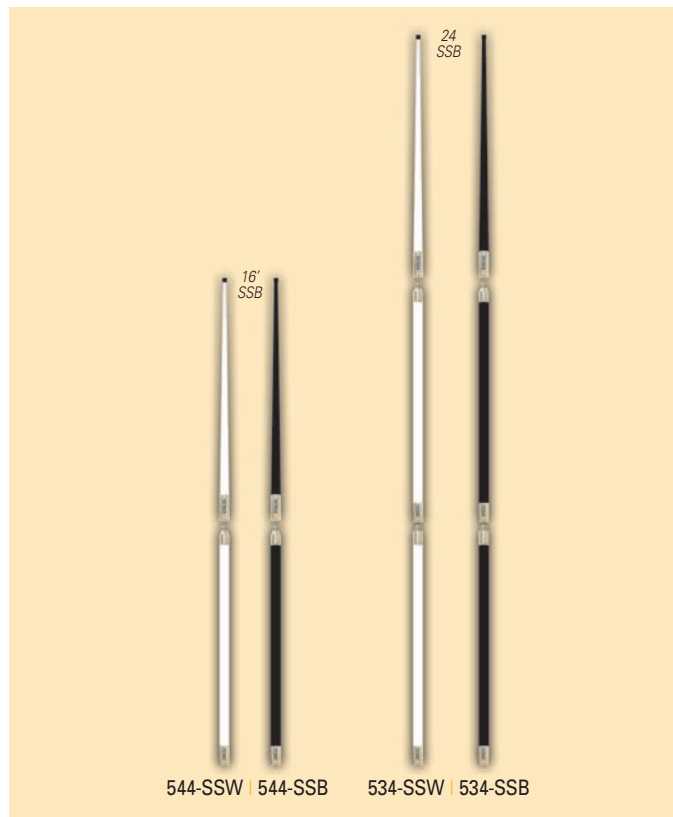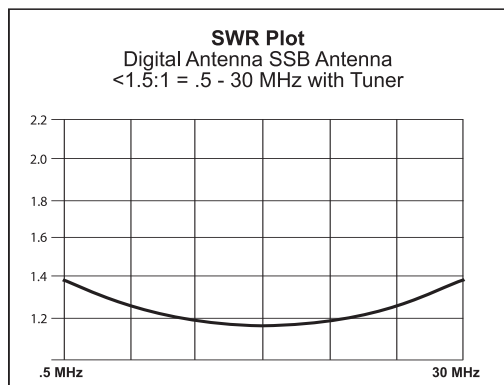

Product Technical Specifications

Radiation Pattern	Omni-Directional
VSWR	<1.5:1 = .5 - 30 MHz with Tuner
Max Input Power	1000 watts
Dimensions (16")	8' I x 1.5" OD (bottom section) 8' I x 1" tapered OD (top section)
Dimensions (24")	8' I x 1.5" OD (bottom section) 8' I x 1.5" OD (middle section) 8' I x 1" tapered OD (top section)
Exterior Finish	White, UV stable poly-urethane coating
Ferrule	316 Stainless Steel
RF Termination	1/4"-20 stainless steel stud
Wind Rating	95 mph (16') 80 mph (24')
Installation	1"-14 female threads
Wire (not included)	Use 10-12 AWG high voltage insulated wire



Digital Antenna, Inc.
www.digitalantenna.com

5325 NW 108th Avenue
Sunrise, FL 33351

▶ t 954.747.7022
▶ f 954.747.7088